



EMALLA[®]

MAKE TATTOOING SAFE



GRAND
WIRELESS MACHINE

G4



OVERVIEW

Rechargeable Battery

Colorful LED Screen

Brushless Motor

Click-Grip Needle
Depth Adjustment




Control Buttons

360-Positioning
Of The Battery

Ergonomic Grip And
Comfortable Adjustment


SPECIFICATIONS

- **OUTPUT VOLTAGE: 5-13V**
- **CHARGER INPUT: USB-C 2A**
- **SIZE: H 125MM X W 34MM(HEAVY GRIP: W 38MM)**
- **WEIGHT:200G WITH 34MM GRIP**
226G WITH 38MM GRIP
- **BATTERY LIFE: 1800mAh**
- **GRIP SIZE: 34MM|38MM**
- **STROKE:3.5MM|4.2MM|5.0MM**
- **INCREMENT/DECREMENT VOLTAGE INTERVAL: 0.1V**

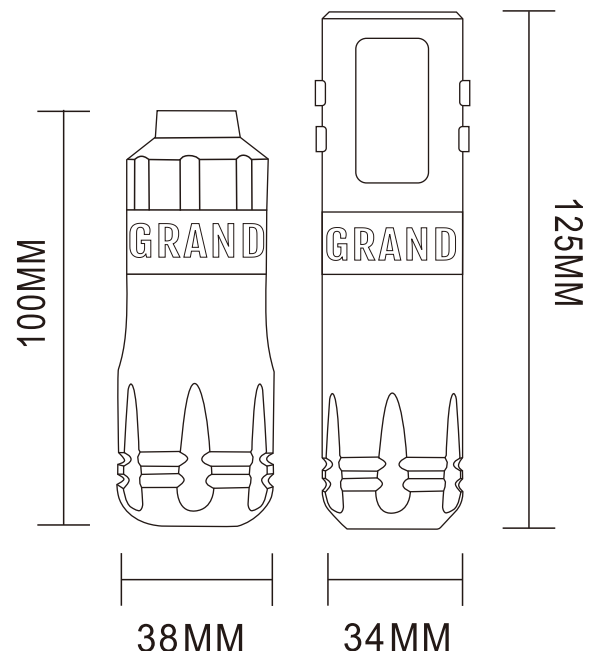

DISPLAY FUNCTION

| COLORFUL LED SCREEN

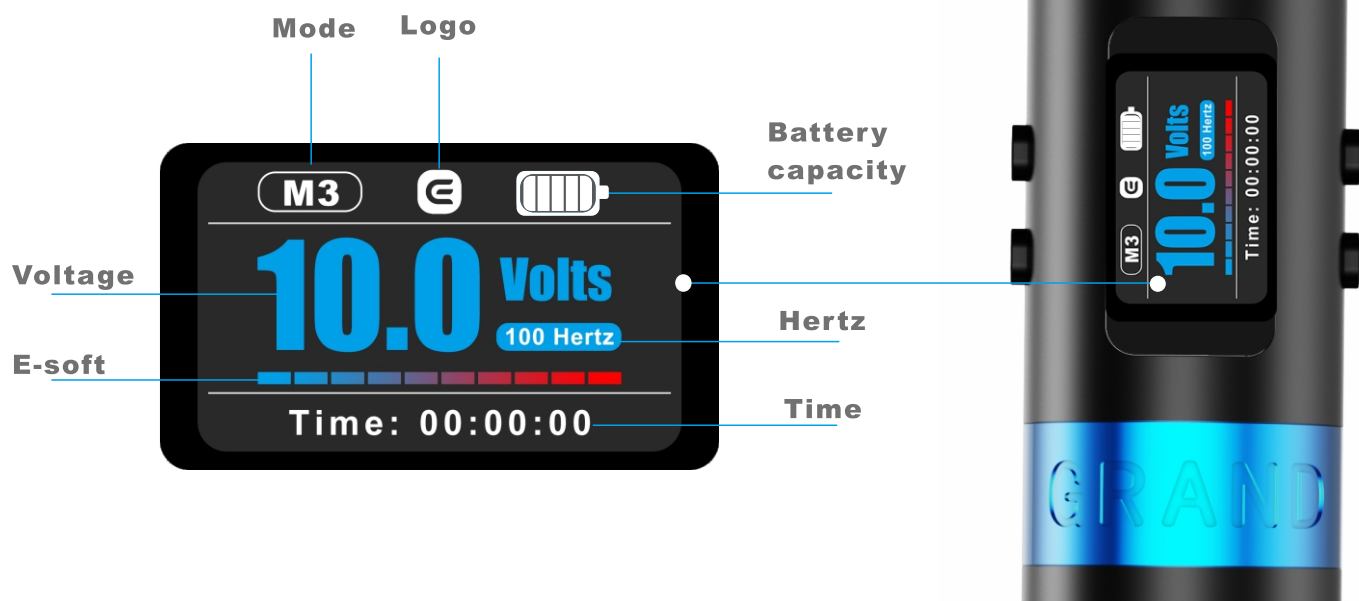

FUNCTION DETAILS OF COLORFUL LED SCREEN

Hold the power button for 3 seconds to power on or off



BATTERY CAPACITY

5 bars = 100%, 4 bars = 80%, 3 bars = 60% ,2 bars=40%and 1 bar = 20%
Single bar is blinking please charging



MODE CHANGE

M1 mode: 100% hard, for liner and hard area of skin
M2 mode: 85% soft, for shader and soft area of skin
M3 mode: 10%-100% soft, named E-soft which can adjust power of soft.



1bar=10% soft, 10 bars=100% hard

10 adjustable modes artists can find their soft modes in tattooing



JUMP STAR

The logo is blue, function open
The logo is white, function close



VOLTAGE

Voltage range: 5-13v | Click the voltage buttons to decrease/ increase voltage by 0.1v, long press to adjust voltage quickly.



HERTZ

45-177hertz, changing with voltage



TIME

The time is 0-24 Hrs in one minute intervals, once time stops it resets back to zero.

Charging: Charging time is about four hours. For best results, please use provided charging cable.

BUTTONS FUNCTION

360-Positioning Of The Battery



BUTTONS FUNCTION

M MODEL BUTTON
Long press to change the font color
Single click to adjust power of soft model
Double clicks to change screen position(Left or right)

POWER BUTTON
Function one, Pressing 3 seconds to Power on / o f f.
Function two, Pressing again to work start / pause.
Double clicks to change model
(M1- Hard|M2-soft|M3-E-Soft)

UP BUTTON
Increase voltage by 0.1v, long press to increase voltage quickly and increase the soft percentage

DOWN BUTTON
Decrease voltage by 0.1v, long press to decrease voltage quickly and increase the soft percentage

+ DOWN BUTTON JUMP STAR FUNCTION
Both press power and down buttons for 3 seconds to open or close jump star function



34MM

38MM

REPLACE POWER



RCA ADAPTER

In order to ensure the sustainability of tattoos, we provide RCA adapters. When the battery power is used up, we can change the RCA adapter to connect the RCA cable.

THE POWER BATTERY

The battery part is 1800 mAh and can be used for about 6-8 working hours. When the battery is used up, you can replace another new spare battery and continue to complete your tattoo work, it is simple and convenient.

VOLTAGE PARAMETERS

While voltage is a parameter that will vary from artist to artist, the battery has been tested to operate at a minimum voltage of 5 Volts to a maximum voltage of 12 Volts. Depending on the type of needle configuration, or brand you use, feel free to adjust the voltage to obtain the desired performance.

WARRANTY

EMALLA GRAND G4 wireless machine warranty period is 12 months from the date of purchase. If you discover a defective product covered by this warranty , we will repair the item . Proof of purchase in the form of a sales receipt must be provided for warranty repair .

This warranty will be void if the device shows signs of having been tampered, disassembled, handled roughly, dropped, overexposed to moisture or damage resulting in compromised functionality .

REPAIR PROCESS

Step 1

Please contact us by email before shipment.

Step 2

After we confirmed with you by email, you can ship the machine to us. Please make sure to securely package your machine. We are not responsible for lost or damaged machines during transit.

Step 3

Please don't forget send the tracking number to us after Shipping package. More information, please contact info@emallatattoo.com. We will reply and solve your question soon.